



 **GLOSS**

2025 EN



Content

	Spray guns	2
	Accessories for spray guns	6
	Air filtration	9
	Mixing cups	12
	Tools and equipment	13
	Masking foils	20
	Cleaning products	22

SPRAY GUNS



GLOSS GH-SH

Low Volume and Medium Pressure spray gun creates smooth atomization of all kind of metallic paint and clearcoat. Modern body design creates comfortable handling.

- L.V.M.P
- Purpose: Basecoat and Clearcoat
- Working pressure: 2,5 bar
- Pattern width: 280 mm
- Air consumption: 254-311 l/min
- Spray distance: 200 mm
- Air Inlet: 1/4" Universal Thread
- Cup capacity: 600 ml
- Nozzle 1,3 mm - for paints, clearcoats
- Nozzle 1,4 mm - for primers

Code	Nozzle	Packaging
GH-SH 1.3	1,3 mm	1 pc
GH-SH 1.4	1,4 mm	1 pc



GLOSS GH-SH (MINI)

High Volume and Low Pressure spray gun is designed for quick repair processes. Excellent spraying efficiency. High quality stainless steel nozzle and needle. Suitable for waterborne paints as well. Ideal for part painting.

- H.V.L.P
- Purpose: Basecoat and Clearcoat
- Working pressure: 1,5 bar
- Pattern width: 120 mm
- Air consumption: 142-198 l/min
- Spray distance: 150 mm
- Air Inlet: 1/4" Universal Thread
- Cup capacity: 250 ml
- Nozzle 1,0 mm - for paints, clearcoats

Code	Nozzle	Packaging
GH-SH mini	1,0 mm	1 pc



SPRAY GUNS



GLOSS GMP-500

High Volume and Low Pressure spray gun is suitable for applying acrylic products, spray putty and basecoat paint. The spray gun body is covered with chrome-effect paint.

- H.V.L.P.
- Purpose: Primer/Filler, Acrylic paint and Clearcoat
- Working pressure: 2,0 bar
- Pattern width: 280 mm
- Air consumption: 283 - 311 l/min
- Spray distance: 170 mm
- Air Inlet: 1/4" Universal Thread
- Cup capacity: 600 ml
- Nozzle 1,3 mm - for paints, clearcoats
- Nozzle 1,8 mm - for fillers

Code	Nozzle	Packaging
GMP-500	1,3 mm	1 pc
GMP-500 1.8	1,8 mm	1 pc



GLOSS GMP-102 (MINI)

High Volume and Low Pressure mini spray gun is perfect tool to spray small areas with acrylic products and basecoat paints.

- H.V.L.P.
- Purpose: Spot repair and Aerography
- Working pressure: 2,0 bar
- Pattern width: 100 mm
- Air consumption: 141 - 155 l/min
- Spray distance: 150 mm
- Air Inlet: 1/4" Universal Thread
- Cup capacity: 250 ml
- Nozzle 1,0 mm - for paints, clearcoats

Code	Nozzle	Packaging
GMP-102	1,0 mm	1 pc

SPRAY GUNS



GLOSS GH-827

Reduced pressure spray gun will atomize acrylic fillers easily and smoothly. The spray gun body comes with chrome-effect paint, making cleaning easier.

- Reduced Pressure
- Purpose: Primer/Filler
- Working pressure: 3,0 - 3,5 bar
- Pattern width: 240 mm
- Air consumption: 254 - 311 l/min
- Spray distance: 200 mm
- Air Inlet: 1/4" Universal Thread
- Cup capacity: 600 ml
- Nozzle 1,4 mm - for primers
- Nozzle 1,8 mm - for fillers
- Nozzle 2,0 mm - for fillers
- Nozzle 2,5 mm - for spray putty

Code	Nozzle	Packaging
GH-827RPX	1,4 mm	1 pc
GH-827RPX1.8	1,8 mm	1 pc
GH-827RPX2.0	2,0 mm	1 pc
GH-827RPX2.5	2,5 mm	1 pc



GLOSS GH-827X

High Volume and Low Pressure spray gun creates a smooth atomization of all kinds of metallic paint and clearcoat.

- H.V.L.P.
- Purpose: Basecoat and Clearcoat
- Working pressure: 2,0 - 2,5 bar
- Pattern width: 260 mm
- Air consumption: 311 - 368 l/min
- Spray distance: 200 mm
- Air Inlet: 1/4" Universal Thread
- Cup capacity: 600 ml
- Nozzle 1,3 mm - for paints, clearcoats

Code	Nozzle	Packaging
GH-827X	1,3 mm	1 pc



SPRAY GUNS



GLOSS GH-GLG



Low Volume and Medium Pressure atomization spray gun applies acrylic paint and clearcoat perfectly. It is very easy to maintain due to its smooth body.

- L.V.M.P.
- Purpose: Primer/Filler, Acrylic paint and Clearcoat
- Working pressure: 2,5 bar
- Pattern width: 280 mm
- Air consumption: 255-311 l/min
- Spray distance: 200 mm
- Air Inlet: 1/4" Universal Thread
- Cup capacity: 600 ml
- Nozzle 1,3 mm - for paints, clearcoats
- Nozzle 1,4 mm - for clearcoats, primers
- Nozzle 1,8 mm - for fillers

Code	Nozzle	Packaging
GH-GLG 1.3	1,3 mm	1 pc
GH-GLG 1.4	1,4 mm	1 pc
GH-GLG 1.8	1,8 mm	1 pc



GLOSS GH-2000X



High Volume and Low Pressure mini spray gun provides optimum atomisation, in overspray while effectively covering small areas with acrylic products and basecoat paints.

- H.V.L.P.
- Purpose: Spot repair and Aerography
- Working pressure: 2,0 bar
- Pattern width: 100 mm
- Air consumption: 141 - 155 l/min
- Spray distance: 150 mm
- Air Inlet: 1/4" Universal Thread
- Cup capacity: 125 ml
- Nozzle 0,8 mm - for paints, clearcoats

Code	Nozzle	Packaging
GH-2000X	0,8 mm	1 pc



ACCESSORIES FOR SPRAY GUNS



GLOSS SPRAY GUN GRAVITY CUP

Painting cup for spray gun with a M16x1.5 / M16x2 thread.



Code	Description	Capacity	Packaging
GPC600A	male thread	600 ml	1 pc
GPC-600GPP	femal thread	600 ml	1 pc

GLOSS PAINT FILTERS

Universal gravity feed spray gun paint filter effectively removes various dirt residues. It is resistant to most solvents and easy to clean.



Code	Description	Packaging
GF-10	10 pcs	1 set

ACCESSORIES FOR SPRAY GUNS



GLOSS PRESURE REGULATOR

Air pressure gauge with regulator and manometer accurately controls paint atomization during spraying. It is suitable for every spray gun.

- Air consumption: 362 l/min at 3 bar
- Air Inlet: 1/4" BSP
- Waterproof, solvent resistant



Code	Packaging
GFR-5	1 pc

GLOSS FLEXIBLE JOINT

Flexible metal sprayer connection is designed to allow free movement during painting.



Code	Description	Packaging
OP20MS1	1/4 male	1 pc
OP20FS1	1/4 female	1 pc

ACCESSORIES FOR SPRAY GUNS



8

GLOSS AIR COUPLERS

Pneumatic coupling is used to connect compressed air tools to a compressed air line. It allows a tool to be easily connected or disconnected to a hose or pipe while it is under pressure.



<u>Code</u>	<u>Dimensions</u>	<u>Packaging</u>
G-EPF20 (Female)	1/4"	1 pc
G-EPM20 (Male)	1/4"	1 pc
G-ESH20-8	8 mm	1 pc
G-ESH20-10	10 mm	1 pc

GLOSS PVC AIR HOSE

High-pressure air hose with a quick coupling and nipple.



<u>Code</u>	<u>Dimensions</u>	<u>Packaging</u>
G-HOSE15	9.7*15.5 mm x 15 m	1 pc

GLOSS PROFESSIONAL AIR FILTER AC-6002

Air filter with pressure regulator and outlet module. Filtering particles less than 0,01 microns. Providing clean compressed air - with a separation degree of 99,998%.



- Air flow: 2300 l/min at 10 bar
- Max. operating temperature 60 °C
- Air inlet: 1/2"
- Two outlet valves 1/4"

Code	Packaging
AC-6002	1 pc

GLOSS PROFESSIONAL AIR FILTER AC-6003

Triple-stage filter unit complete with a fine filter and activated charcoal cartridge with an air outlet module, filtering particles less than 0.01 microns. Providing clean compressed air with a separation degree of 99.998%.



- Air flow: 2000 l/min at 10 bar
- Max. operating temperature 60 °C
- Air inlet: 1/2" internal thread
- Two outlet valves 1/4" bsp external thread

Code	Packaging
AC-6003	1 pc



GLOSS CARTRIDGE FOR FILTER AC-6002/AC-6003

Replaceable fine filter cartridge: separates particles greater than 0.01 microns. It must be replaced when the pressure difference indicated by these two gauges is more than 0.8 bar.



<u>Code</u>	<u>Packaging</u>
AC6000-366	1 pc

GLOSS CARTRIDGE FOR FILTER AC-6003

Activated charcoal filter: removes particles less than 0.01 microns, oil vapour and organic odours. It should be replaced every 3 months.



<u>Code</u>	<u>Packaging</u>
AC6000-369	1 pc

AIR FILTRATION



GLOSS OIL AND WATER SEPARATOR

Eliminates water, oil, dust, and particles in air line from air compressor. Can be directly connected to paint airbrush, air compressors and other pneumatic tools.

11

- Inlet and outlet: universal 1/4" NPT
- Operating temp.: -5 °C to 55 °C
- Max. Pressure: 6 bar

Code	Packaging
GF04	1 pc

MIXING CUPS



12



GLOSS MIXING CUPS

Graduated plastic mixing cups with lids, designed for accurate and easy mixing of paints and coatings. Solvent resistant with printed measurement markings on the outside.

Code	Capacity	Packaging
GMC 0385	cup 385 ml	200 pcs
GMC 0750	cup 750 ml	200 pcs
GMC 1400	cup 1400 ml	200 pcs
GMC 2300	cup 2300 ml	100 pcs
GCL 0385	lid 385 ml	200 pcs
GCL 0750	lid 750 ml	200 pcs
GCL 1400	lid 1400 ml	200 pcs
GCL 2300	lid 2300 ml	100 pcs

GLOSS CENTRAL VACUUM RANDOM ORBITAL SANDER

Orbital air sander is perfect for bodywork sanding. The air sander features a compact palm grip that lets you reach tight spots easily, a paddle trigger and a built-in regulator.



- Pad size: 150 mm
- Orbit: 5 mm
- Free speed: 11000 rpm
- Air consumption: 354 l/min at 6,2 bar
- Net weight: 0,9 kg

Code	Packaging
GST-7138DC-6	1 pc

GLOSS PNEUMATIC ORBITAL SANDER

Orbital air sander is perfect for bodywork sanding! The air sander features a compact palm grip that lets you reach tight spots easily, a paddle trigger and a built-in regulator.



- Pad size: 150 mm
- Orbit: 5 mm
- Free speed: 10500 rpm
- Air consumption: 354 l/min at 6,2 bar
- Net weight: 0,98 kg

Code	Packaging
GSM00	1 pc

14



GLOSS PROFESIONAL SAND BLASTER KIT

Air Sandblaster Kit is ideal for removing rust, lime scale, chemicals, and paint. Perfect for restoration work, it restores shine to dull metals and cleans metal rims, fences, and external brickwork. A powerful tool for efficient surface preparation and refurbishment.

Code	Packaging
SA-6602	1 pc

GLOSS MINI AIR ANGLE SANDER

Ideal for metal grinding, deburring and multi-purpose refinishing in any industrial application.



GLOSS 2" AIR ANGLE SANDER

Ideal for metal grinding, deburring and multi-purpose refinishing in any industrial application.



- Capacity: 6 mm
- Free speed: 20000 rpm
- Air consumption: 85 l/min
- Net weight: 0,49 kg



- Pad size: 50.8 mm
- Free speed: 18000 rpm
- Air consumption: 283 l/min
- Net weight: 0,8 kg

Code	Packaging
GST-P7734M	1 pc

Code	Packaging
GST-AS10N2R	1 pc

GLOSS / Oil-free
Technology

Fast Storage, High Flow Supply



High flow
rate



Oil-free



Low noise



Low
vibration



8bar high
pressure




High speed
silenced
motor



Overload
protection



Low
temperature
rise

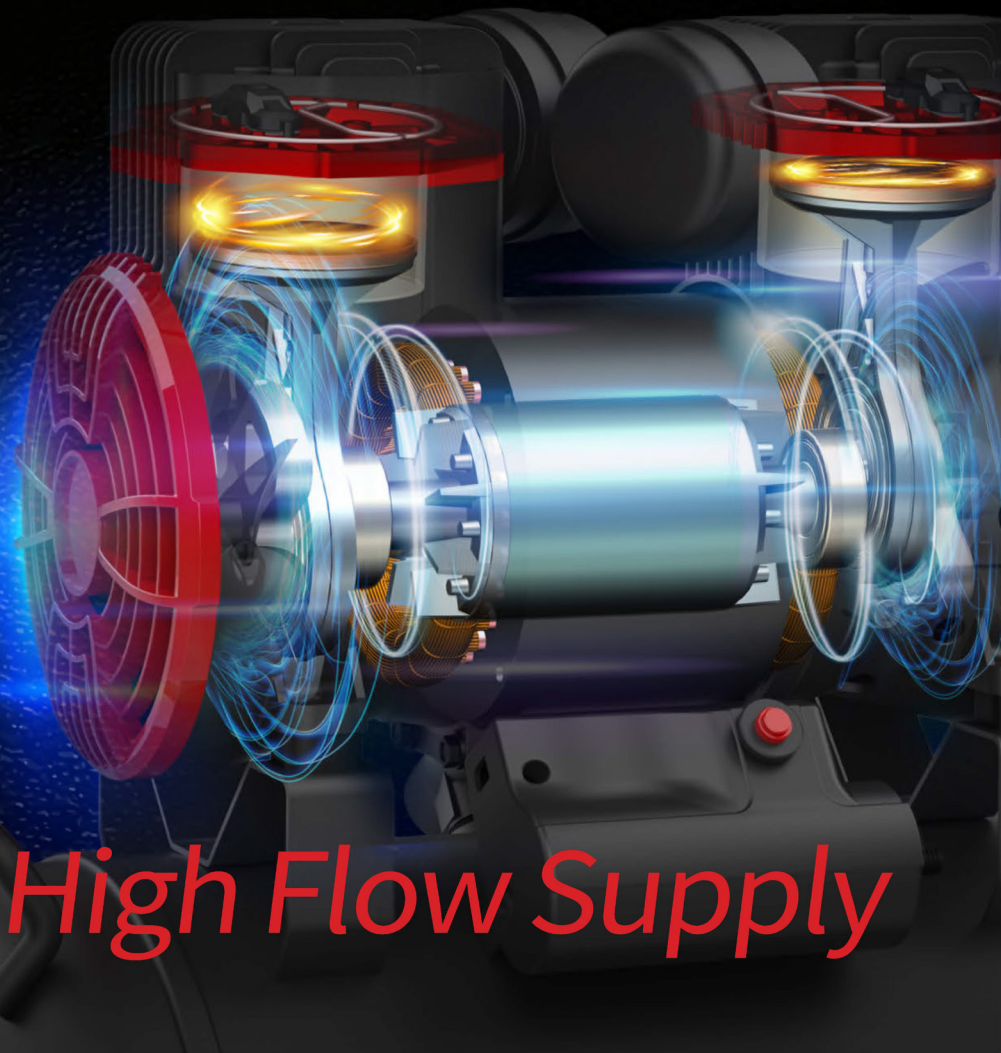

Fast Storage, High Flow Supply



GLOSS OIL FREE AIR COMPRESSOR, AIR TANK 24L

High quality single engine oil-free air compressor.
High air efficiency. Low vibration. Low noise level.
Overheat protection.

17

- Air efficiency: at 8 bar - 100 l / min
- Air efficiency: at 4 bar - 145 l / min
- Capacity: 24 l
- Weight: 21 kg

Code	Packaging
2-1450F24	1 pc



GLOSS OIL FREE AIR COMPRESSOR, AIR TANK 50L

High quality two-engine oil-free air compressor.
High air efficiency. Low vibration. Low noise level.
Overheat protection.

- Air efficiency: at 8 bar - 200 l / min
- Air efficiency: at 4 bar - 290 l / min
- Capacity: 50 l
- Weight: 50 kg

Code	Packaging
2-1450X2F50	1 pc



GLOSS OIL FREE AIR COMPRESSOR, AIR TANK 100L

High quality single engine oil-free air compressor.
High air efficiency. Low vibration. Low noise level.
Overheat protection.

19

- Air efficiency: at 8 bar - 300 l / min
- Air efficiency: at 4 bar - 435 l / min
- Capacity: 100 l
- Weight: 91 kg

Code	Packaging
2-1450X3F100	1 pc

MASKING FOILS



GLOSS MASKING FILM

All purpose antistatic HDPE masking film designed to protect surfaces from dust, paint, dirt, and moisture.



Code	Dimension	Packaging
GP 45705	4,5 x 7 m x 6 µm	35 pcs

GLOSS MOISTURE ABSORBING MASKING FILM

Moisture absorbing breathable masking film allows masking of damp surfaces while minimizing ghost marking after baking.



Code	Dimension	Packaging
GL KMR9	5 x 100 m x 14 µm	1 roll

MASKING FOILS



GLOSS MASKING FOIL

Transparent HDPE film with electrostatic charge for fast adhesion to surfaces. Facilitates easy edge cutting and prevents dust and particles from contaminating unprotected areas.

21

Code	Dimension	Packaging
GL KMR1	4 x 150 m x 10 μ m	1 roll
GL KMR2	4 x 300 m x 10 μ m	1 roll
GL KMR4	5 x 100 m x 10 μ m	1 roll
GL KMR6	6 x 100 m x 10 μ m	1 roll



22



GLOSS UNIVERSAL ENGINE CLEANER

Ready to use engine cleaner specially formulated for cleaning engines and engine compartments. Effectively removes grease, oil, and stubborn stains for a clean, residue free finish.



Code	Contents	Packaging
CL 06M 05	5 l	1 pc
CL 06M 25	25 l	1 pc

CLEANING PRODUCTS



GLOSS SYNTHETIC CAR CARE CLOTH

Durable cloth for drying wet surfaces. The car care cloth is suitable for drying off wet car bodies, chrome, plastic and glass surfaces. It is also effective for cleaning car upholstery and interior panels, leaving no water residues or streaks. Its antibacterial treatment helps prevent odours.

23

Code	Dimensions	Packaging
CCC 4450	440 x 500 mm	1 pc







Parko str. 96, Ramučiai
Kaunas distr. LT-54464, Lithuania
Tel. +370 37 308901
Fax +370 37 308902
E-mail: info@helvina.lt